

Weather Shield Premium Series[™] Aluminum Clad Wood Windows & Doors PREMIUM SERIES - FRENCH SLIDING PATIO DOOR STATIONARY (8715)


SCALE: ELECTRONIC FILE IS FULL SCALE INTRODUCED 1/13 LAST UPDATED 3/05/13

- WEATHER SHIELD RESERVES THE RIGHT, AS NECESSARY, TO CHANGE PRODUCT SPECIFICATIONS AND MATERIALS WITHOUT NOTICE.


 DIMENSIONS MAY BE ROUNDED TO THE NEAREST 1/16* [2mm].
- IMPORTANT: DIMENSIONS SHOWN ARE FOR STANDARD SHIM SPACE BETWEEN JAMB AND ROUGH OPENING. WHEN INSTALLING IN A JURISDICTION REQUIRING DESIGN PRESSURE (DP) RATED PERFORMANCE, WINDOW AND DOOR PRODUCTS MUST BE INSTALLED IN THE SAME METHOD THEY WERE INSTALLED FOR TESTING. A SHIM SPACE, NOT TO EXCEED 1/4" [6mm] IS REQUIRED AROUND THE SIDE JAMBS AND HEAD OF UNITS. REFER TO INSTALLATION INSTRUCTIONS FOR COMPLETE DETAILS. (a) SLIDING PATIO DOOR DIRECT-SET TRANSOM (8300) OVER ONE-PANEL SLIDING PATIO DOOR (8715)

 SINGLE TRANSOMS OVER 24-1/2 [622mm] R.O. HEIGHT REQUIRE MINIMUM 3-1/2* [89mm] HORIZONTAL SPREAD


 TWO-WIDE AND THREE-WIDE TRANSOMS REQUIRE MINIMUM 3-1/2 [89mm] HORIZONTAL SPREAD

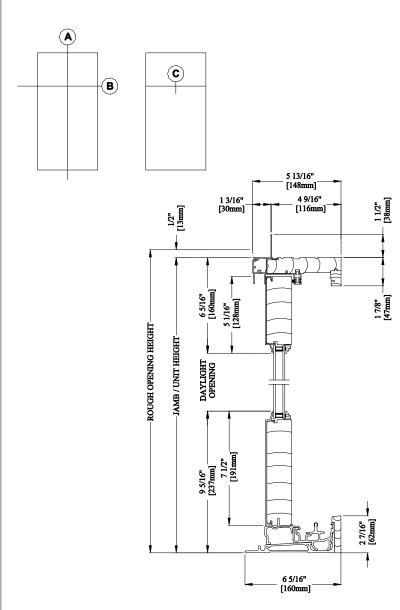


A - VERTICAL SECTION

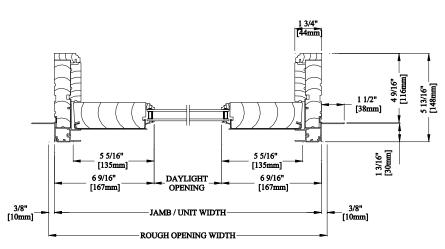

B - HORIZONTAL SECTION



C - HORIZONTAL TIGHT STACK SECTION (a)



C - HORIZONTAL 3-1/2" [89mm] STACK SECTION (a)