

SCALE: ELECTRONIC FILE IS FULL SCALE LAST UPDATE 4/1/11

- WEATHER SHIELD RESERVES THE RIGHT, AS NECESSARY, TO CHANGE PRODUCT SPECIFICATIONS AND MATERIALS WITHOUT NOTICE.
- DIMENSIONS MAY BE ROUNDED TO THE NEAREST 1/16" [2mm].
- IMPORTANT: DIMENSIONS SHOWN ARE FOR STANDARD SHIM SPACE BETWEEN JAMB AND ROUGH OPENING.
 WHEN INSTALLING IN A JURISDICTION REQUIRING DESIGN PRESSURE (DP) RATED PERFORMANCE, WINDOW
 AND DOOR PRODUCTS MUST BE INSTALLED IN THE SAME METHOD THEY WERE INSTALLED FOR TESTING.
 A SHIM SPACE, NOT TO EXCEED 1/4" [6mm] IS REQUIRED AROUND THE SIDE JAMBS AND HEAD OF UNITS.
 REFER TO INSTALLATION INSTRUCTIONS FOR COMPLETE DETAILS.


(a) DOUBLE-HUNG TILT TRANSOM STACKED ABOVE DOUBLE-HUNG TILT.

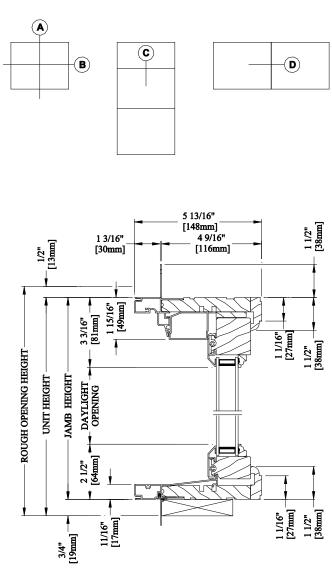


A - VERTICAL SECTION

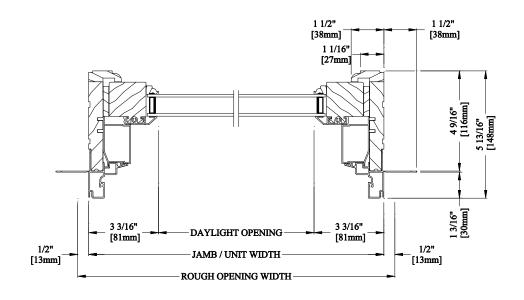

B-HORIZONTAL SECTION



C - HORIZONTAL TIGHT STACK (a)



D-VERTICAL TIGHT MULL